





## Switching Diodes

### FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance

### PINNING

PIN	DESCRIPTION
a	Cathode
b	Anode

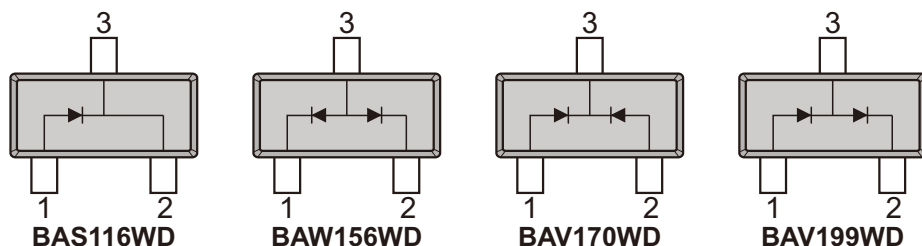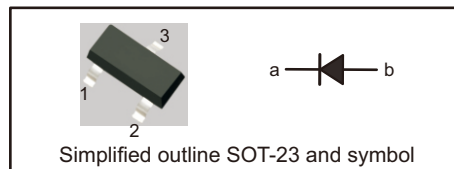

### Maximum Ratings @Ta=25°C

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	85	V
Forward Current	$I_F$	215 125	mA
Non-Repetitive Peak Forward Surge Current @t=1ms	$I_{FSM}$	1.0	A
Power Dissipation	$P_D$	225	mW
Thermal Resistance Junction to Ambient	$R_{thJA}$	417	°C/W
Operation Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 ~ +150	°C

### Electrical Characteristics @Ta=25°C

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	$V_R$	$I_R=100\mu A$	85			V
Forward voltage	$V_{F1}$	$I_F=1\text{ mA}$			0.9	V
	$V_{F2}$	$I_F=10\text{ mA}$			1.0	V
	$V_{F3}$	$I_F=50\text{ mA}$			1.1	V
	$V_{F4}$	$I_F=150\text{ mA}$			1.25	V
Reverse current	$I_R$	$V_R=75\text{ V}$			5	nA
Capacitance between terminals	$C_T$	$V_R=0, f=1\text{ MHz}$			2	pF
Reverse recovery time	$t_{rr}$	$I_F=I_R=10\text{ mA},$ $I_{rr}=0.1 \times I_R, R_L=100\Omega$			3	ns



Fig.1 Power Derating Curve

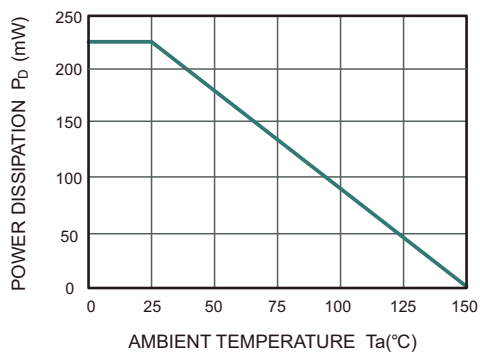


Fig.2 Reverse Characteristics

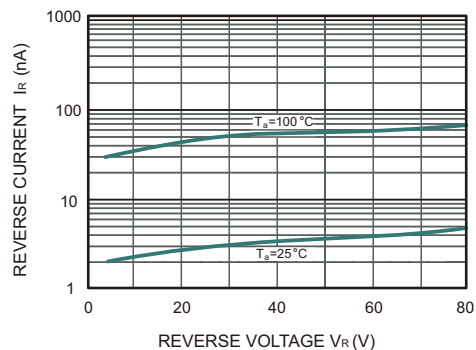


Fig.3 Forward Characteristics



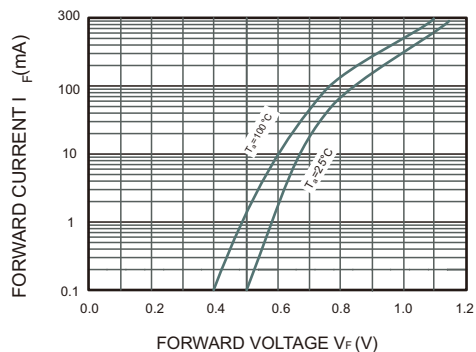


Fig.4 Capacitance Characteristics




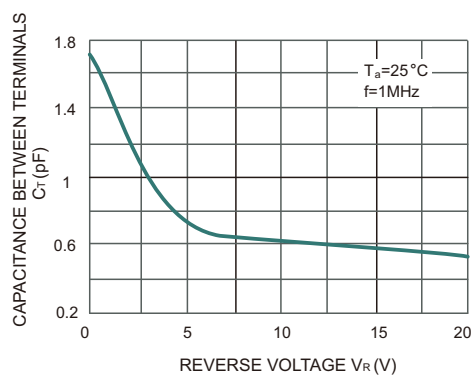

### SOT-23 Package Outline Dimensions

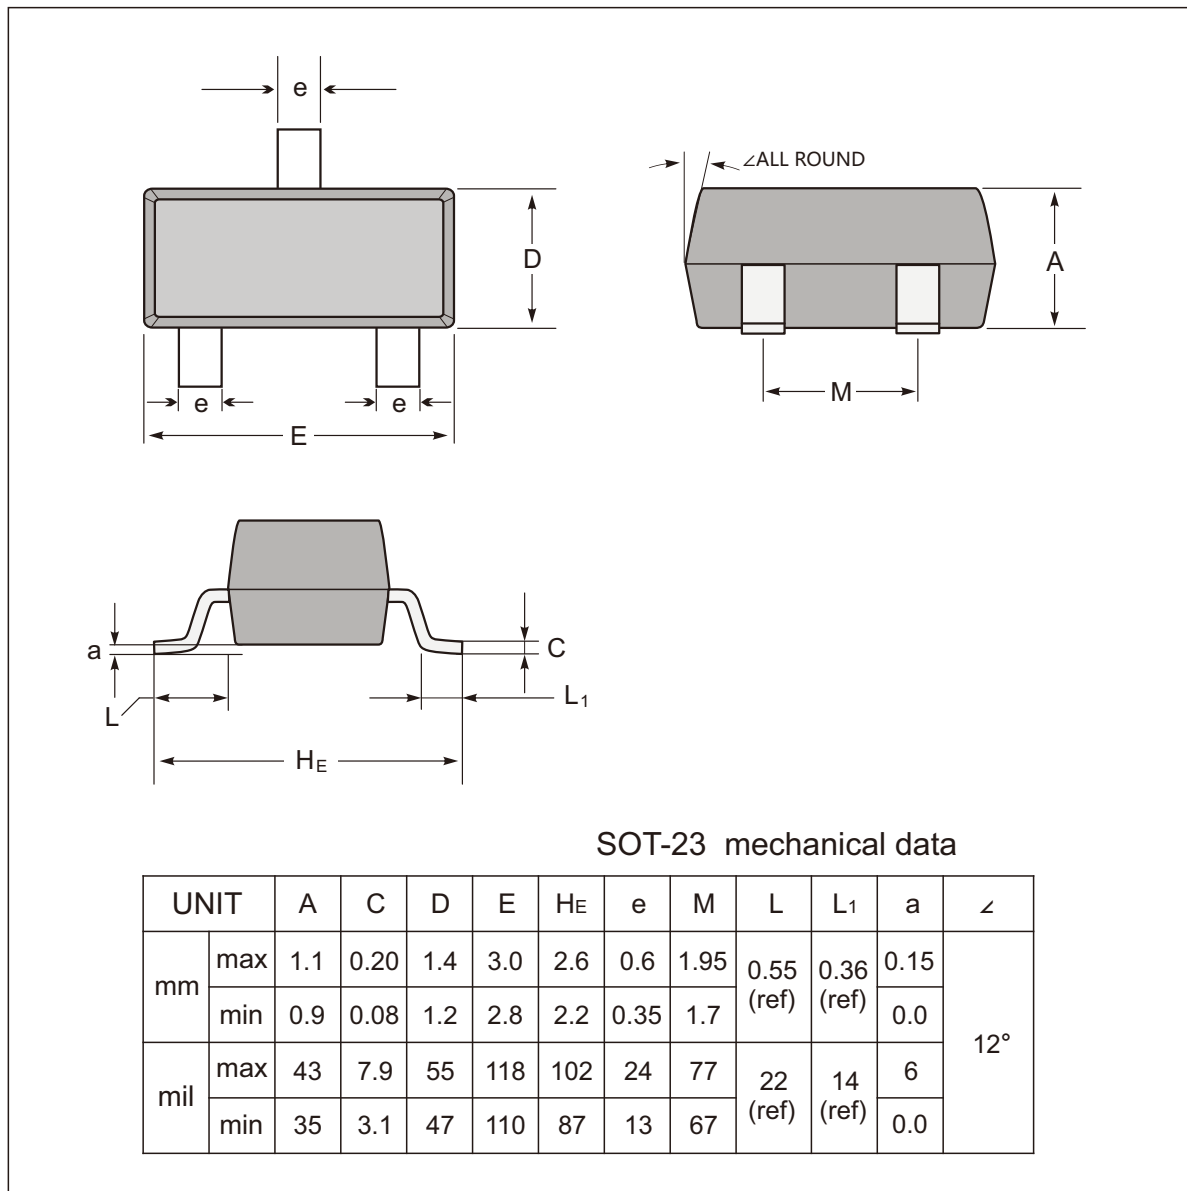

#### The recommended mounting pad size

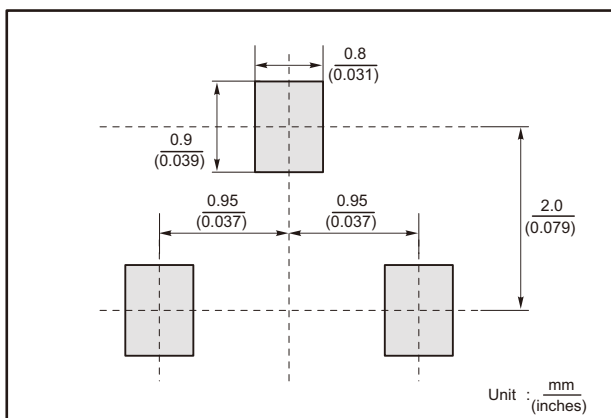

#### Marking

Type number	Marking code
BAS166WD	K50
BAW156WD	53
BAV170WD	51
BAV199WD	52



## Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.