



GLASS PASSIVATED RECTIFIERS

Reverse Voltage - 600 V

Forward Current - 100 A

Features

- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7s, per JESD 22-B106

Mechanical data


- Case: TO-247-3L
- Approx. Weight: 6.3g (0.22oz)
- Lead free finish, RoHS compliant
- Case Material: “Green” molding compound, UL flammability classification 94V-0, “Halogen-free”.

Maximum Ratings And Electrical Characteristics

Ratings At 25°C Ambient Temperature Unless Otherwise Specified

Parameter	Symble	GR10060WD	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Rectified Current Per leg Per device	$I_{F(AV)}$	50 100	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	500	A
Max Instantaneous Forward Voltage at 50 A	V_F	1.2	V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 125^\circ\text{C}$	I_R	10 500	uA
Typical Thermal Resistance	$R_{\theta JC}$	4	°C/W
Operating Junction Temperature Range	T_j	-55 ~ +150	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

TO-247-3L

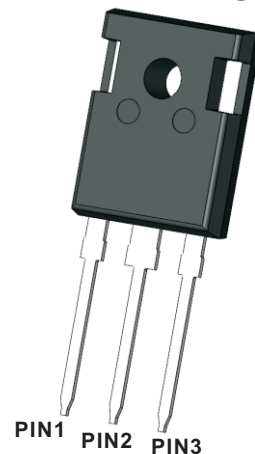

ROHS
COMPLIANT






Fig.1 Forward Current Derating Curve

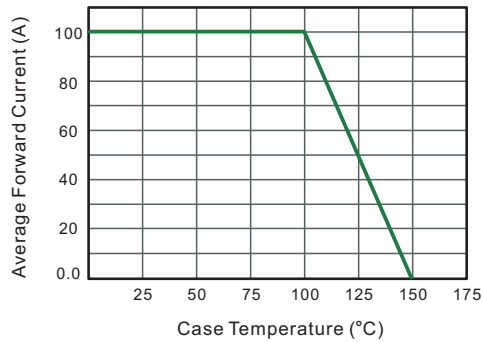


Fig.2 Typical Instantaneous Reverse Characteristics

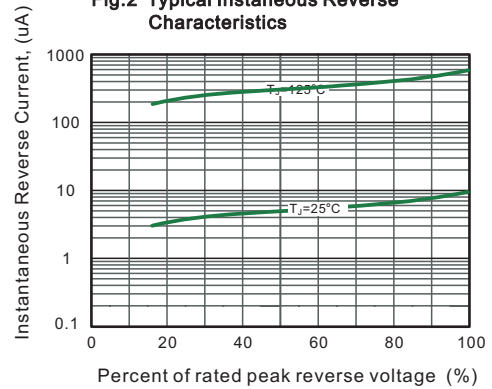


Fig.3 Typical Forward Characteristic


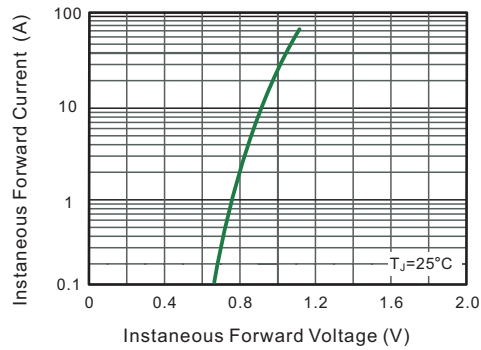



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current



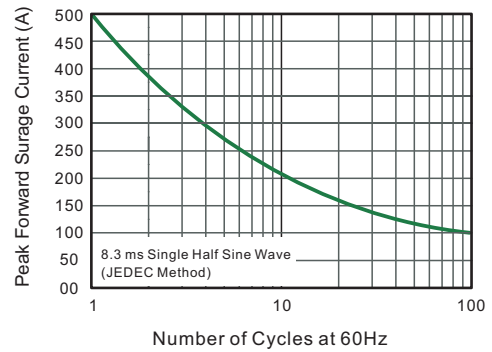

Package Outline
Through Hole Package ; 3 leads

TO-247-3L

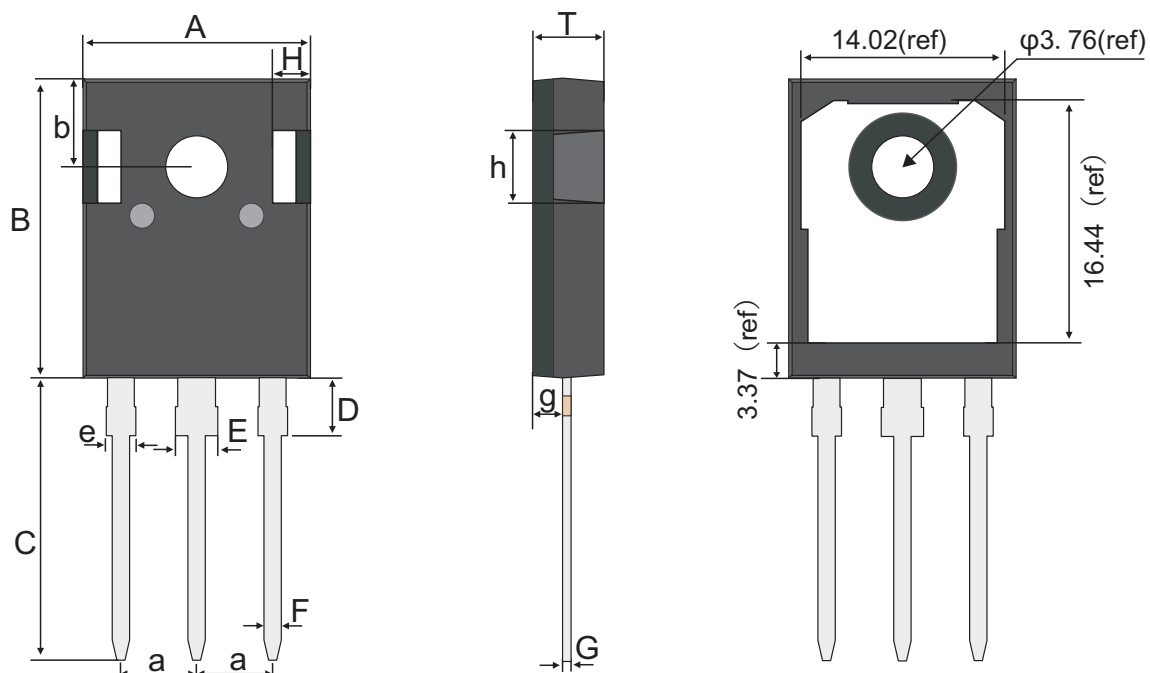

TO-247-3L mechanical data

UNIT		A	a	B	b	C	D	E	e	F	G	g	H	h	T
mm	max	16.01	5.54	21.18	6.26	20.2	4.25	3.25	2.2	1.3	0.7	2.49	2.71	5.37	5.2
	typ	15.81	5.44	20.98	6.16	20.0	4.15	3.10	2.05	1.2	0.6	2.39	2.51	5.17	5.0
	min	15.61	5.34	20.78	6.06	19.8	4.05	2.95	1.9	1.1	0.5	2.29	2.31	4.97	4.8
mil	max	630	218	834	246	795	167	128	87	51	28	98	107	211	205
	typ	622	214	826	243	787	163	122	81	47	24	94	99	204	197
	min	615	210	818	239	780	159	116	75	43	20	90	91	196	189

Marking

Type number	Marking code
GR10060WD	GR10060WD



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any without notice.

Customers should obtain and confirm the latest product information and specifications before final, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.