


Switching Diodes

FEATURES

- For surface mounted applications
- Fast reverse recovery time
- Ideal for automated placement
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 3)

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

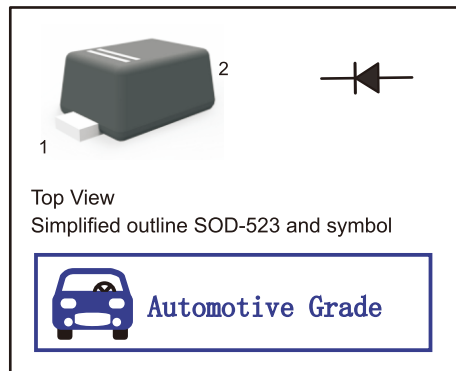

Maximum Ratings at 25 °C

Parameter	Symbols	1N4148WT	Units
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	75	V
Peak Repetitive Reverse Voltage	V_{RRM}		V
Working Peak Reverse Voltage	V_{RWM}		V
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Average Rectified Output Current	I_O	150	mA
Non-repetitive Peak Forward Surge Current@t= 8.3ms	I_{FSM}	0.8	A
Power Dissipation	P_D	150	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbols	Test conditions	Min	Typ	Max	Units
Reverse voltage	$V_{(BR)}$	$I_R = 1\mu A$	100			V
Reverse current	I_R	$V_R = 75V$			1	μA
		$V_R = 20V$			25	nA
Forward voltage	V_F	$I_F = 1\text{ m A}$			0.715	V
		$I_F = 10\text{ m A}$			0.855	V
		$I_F = 50\text{ m A}$			1	V
		$I_F = 150\text{ m A}$			1.25	V
Total capacitance	C_{tot}	$V_R = 0V, f = 1\text{MHz}$			2	pF
Reverse recovery time	t_{rr}	$I_F = I_R = 10\text{mA}, I_{rr} = 0.1 * I_R, R_L = 100\Omega$			4	ns



Fig.1 Power Derating Curve

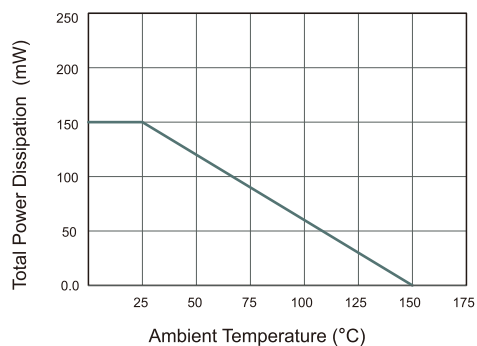


Fig.2 Typical Reverse Characteristics

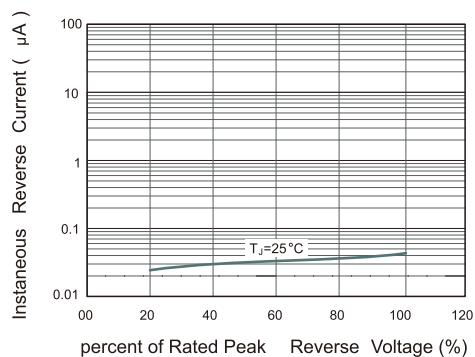


Fig.3 Typical Instantaneous Forward Characteristics


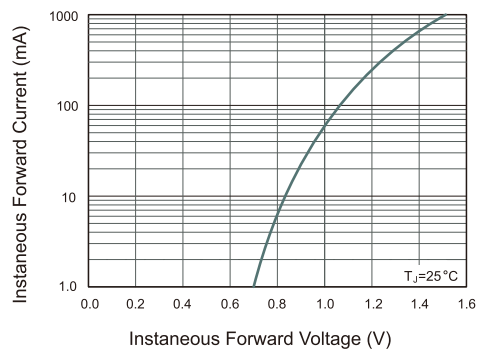


Fig.4 Typical Junction Capacitance




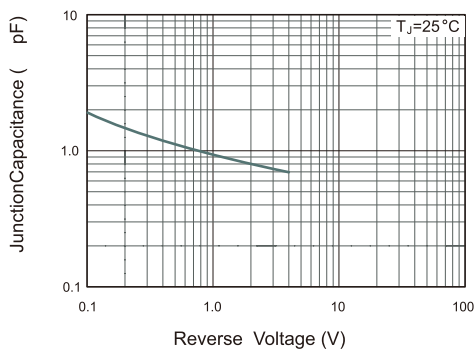


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

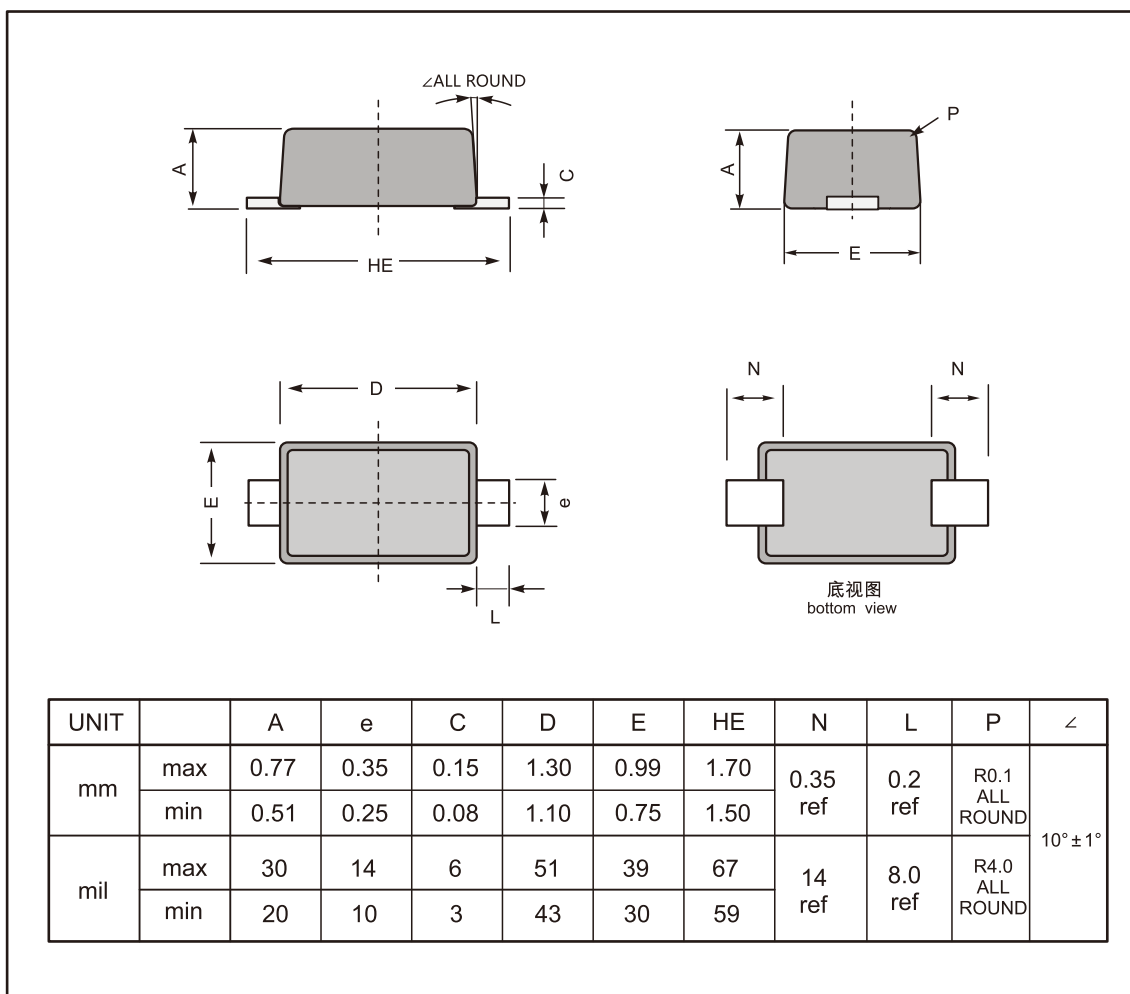

The recommended mounting pad size

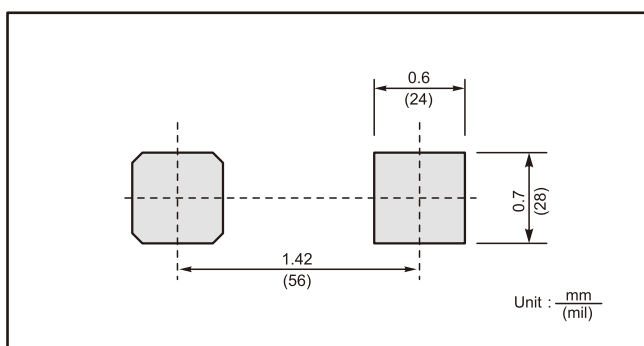

Marking

Type number	Marking code
1N4148WT	T4



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.