



Plastic-Encapsulate ESD Protection Diodes

Features

- 40 Watts Peak Pulse Power per (8/20 μ s)
- IEC61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)
- Protects one bidirectional line or two unidirectional lines
- Low clamping voltage
- Working voltages : 22V

Applications



- Power supply protection
- Power management

Mechanical Characteristics

- Package: SOT-23
- Flammability Rating: UL 94V-0
- Packaging: Tape and Reel

PINNING

PIN	DESCRIPTION
1 , 2	Cathode
3	Anode




Top View

Simplified outline SOT -23 And symbol

Electronics Parameter

Parameter	Symbol
Maximum Reverse Peak Pulse Current	I_{PP}
Clamping Voltage @ I_{PP}	V_C
Peak Reverse Working Voltage	V_{RWM}
Reverse Leakage Current @ V_{RWM}	I_R
Breakdown Voltage @ I_T	V_{BR}
Test Current	I_T
Forward Current	I_F
Forward Voltage @ I_F	V_F

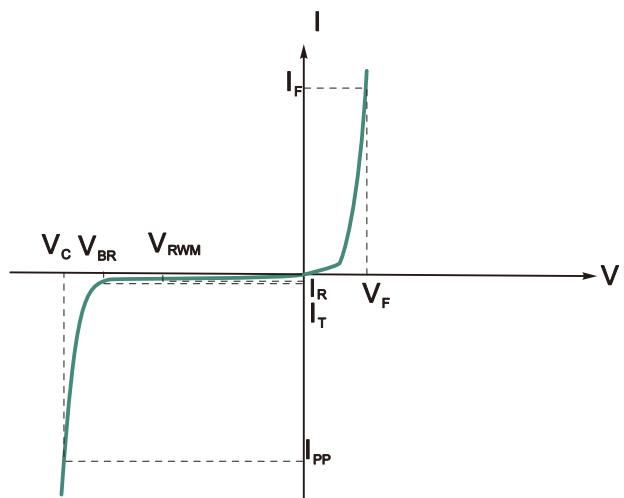



Absolute Maximum Ratings And Characteristics (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μS)	PpK	40	W
Peak Pulse Current	I _{pp}	1	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	±30 ±30	kV
Thermal Resistance Junction to Ambient	R _{θJA}	500	°C/W
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse stand-off Voltage	V _{RWM}				22	V
Breakdown Voltage	V _{BR}	I _T =1mA	25.65	27	28.35	V
Reverse Leakage Current	I _R	V _{RWM} =22V,Ta=25°C			50	nA
Forward voltage	V _F	I _F =10mA,Ta=25°C			0.9	V
Clamping Voltage	V _C	I _{pp} =1A, tp=8/20us			38	V
Junction Capacitance	C _j	V _R =0V,f=1MHz			60	pF



Typical Characteristics

Fig.1 Contact discharge current waveform per IEC61000-4-2

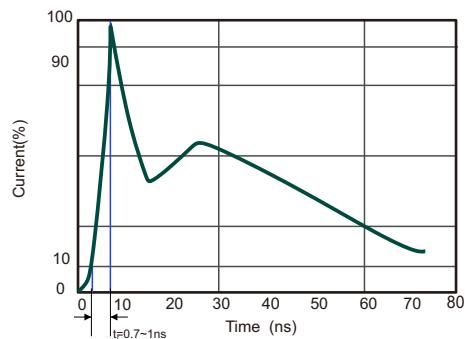


Fig.2 Pulse Waveform

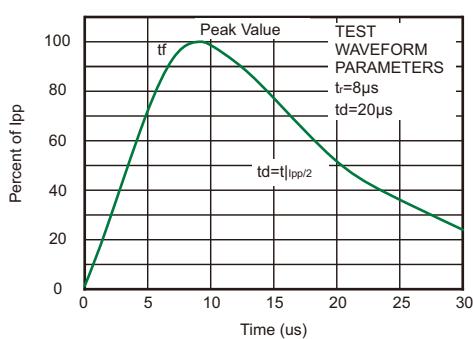


Fig.3 Power Derating Curve

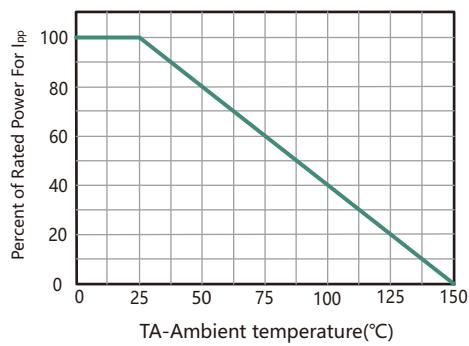


Fig.4 VR VS Ta



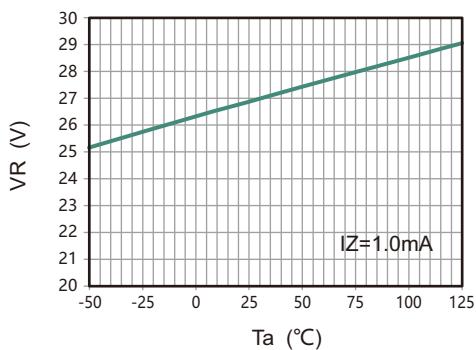


Fig.5 IR VS Ta




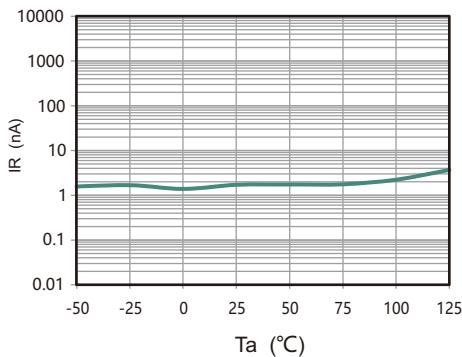

SOT-23 Package Outline Dimensions

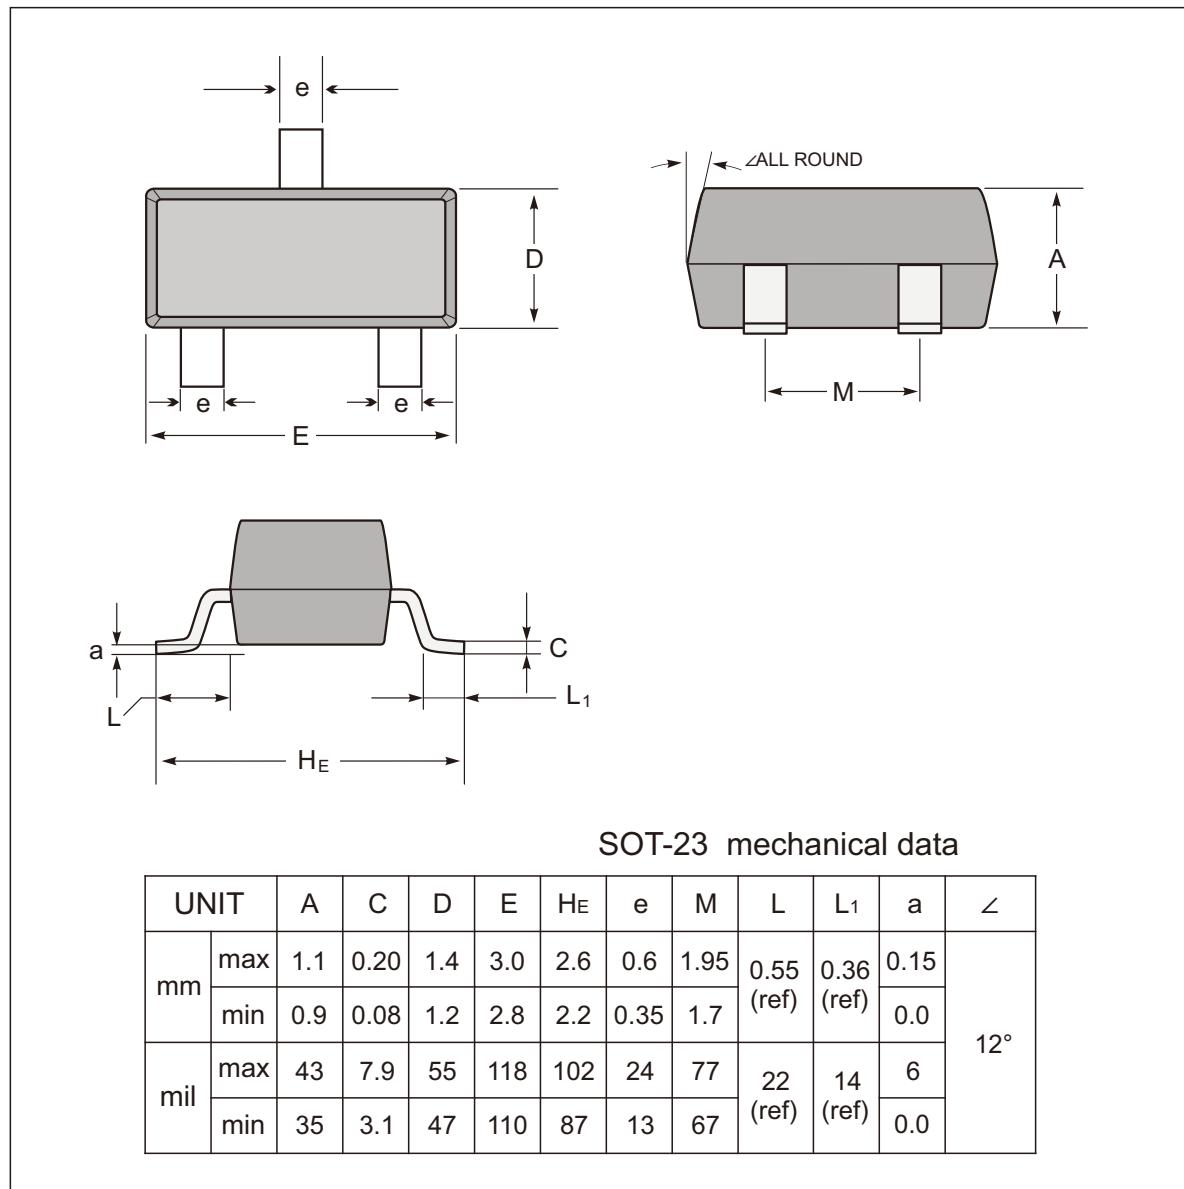

The recommended mounting pad size

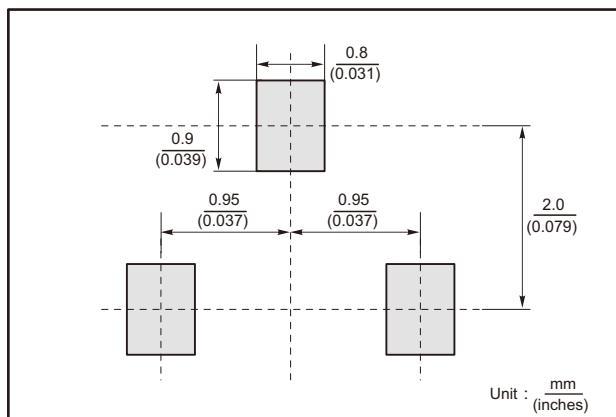

Marking

Type number	Marking code
ESD22V0T2	22T



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.